



KaozhengPro

IT認證考試題庫 專業平臺

考證寶提供最新考古題與模擬試題
協助您高效通過認證考試

www.kaozhengpro.com

Exam : **350-601**

Title : Implementing and Operating
Cisco Data Center Core
Technologies (DCCOR)

Version : DEMO

1.The Cisco UCS blade chassis must send SNMPv3 traps to a network monitoring system. The SNMP trap messages should be authenticated and have protection from closure.

Which SNMP security privileged level should be configured?

- A. noPriv
- B. auth
- C. noAuth
- D. priv

Answer: D

2.What is the DHCP snooping bindings file shown here used for by the Cisco Nexus 9000 Series Switch?

3ebe1518

TYPE DHCP-SNOOPING

VERSION 1

BEGIN

1.1.1.1 512 0001.0001.0005 3EBE2881 Gi1/1 381e06dd02

1.1.1.1 512 0001.0001.0002 3EBE2881 Gi1/1 01c1819c9f

1.1.1.1 1536 0001.0001.0004 3EBE2881 Gi1/1 9ab3e4416e

1.1.1.1 0484 0001.0001.0008 2EBE2281 Gi1/1 40032733f0

1.1.1.1 1 0001.0001.0001 3EBE2881 Gi1/1 23cfc94db4

- A. to retain the DHCP bindings configuration across reboots
- B. to authenticate the users permitted to make the changes to the DHCP snooping feature
- C. to retain the DHCP server configuration across reboots
- D, to permit the users from the IP addresses listed to make changes to the DCHP configuration

Answer: A

3.A network architect considers a Cisco HyperFlex design solution for a company. The proposed solution is for a virtual environment that is not performance-sensitive, but the solution must have high storage capacity and a low cost.

Which Cisco HyperFlex storage configuration should be used?

- A. All-Flash
- B. Hybrid
- C. All-SAN
- D. All-NVMe


Answer: B

4.What is a benefit of using the Cisco UCS Lightweight upgrade feature?

- A. The firmware version of a component e updated only when it has boon modified.
- B. A sod reboot is available for the fabric interconnects
- C. Security updates are scheduled with the next reboot d the fabric interconnects.
- D. All servers are rebooted to push the latest updates.

Answer: A

5.Refer to the exhibit.

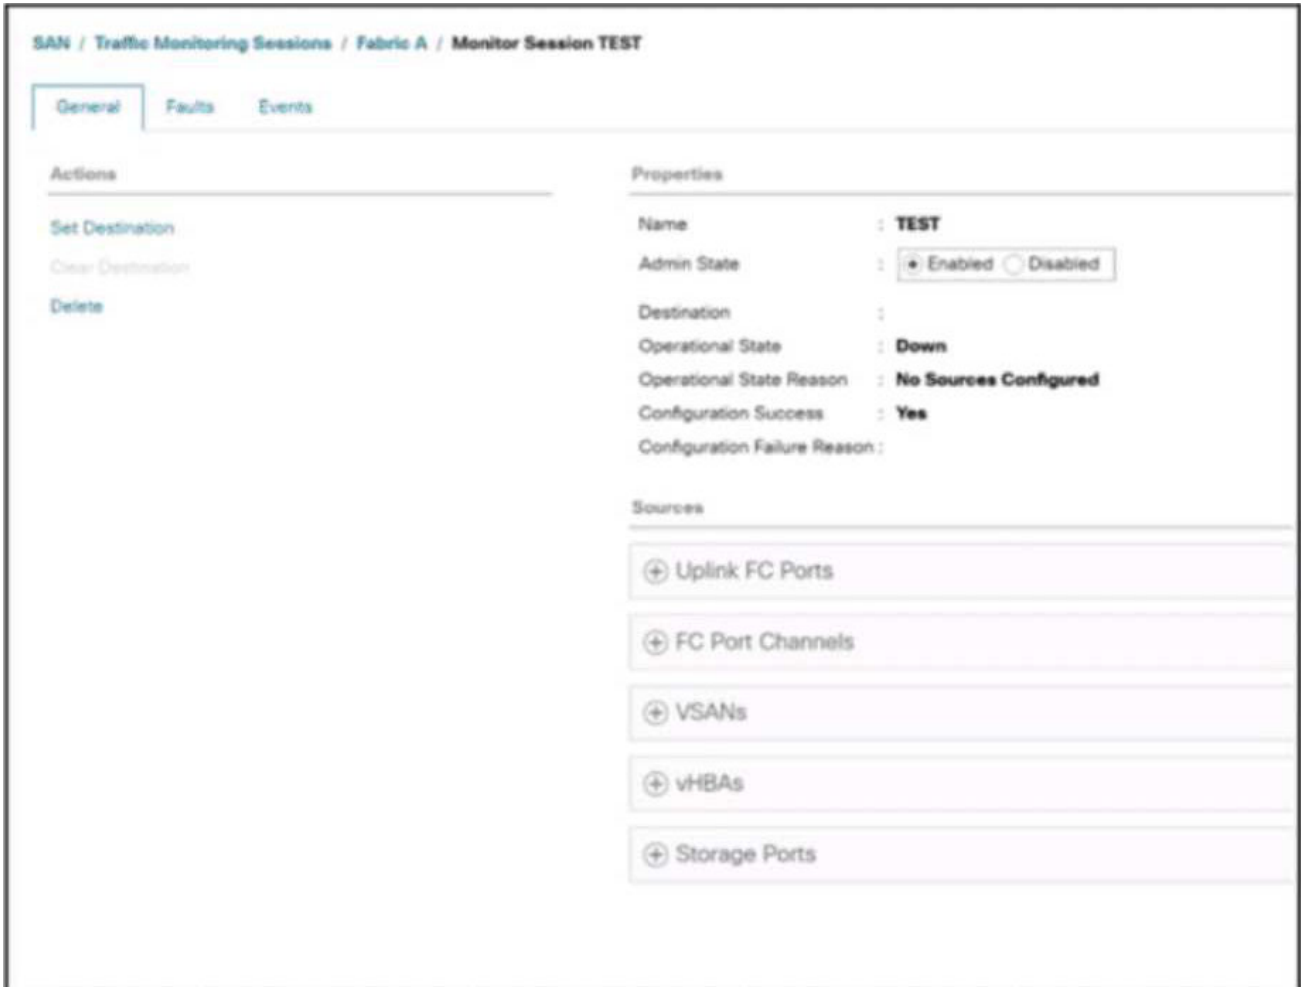

Users report SAN traffic packet loss on a blade server that is managed by using Cisco UCS Manager. An engineer must implement a SPAN feature to an external Fibre Channel analyzer.

Which configuration source in the TEST monitoring session must the engineer select?

- A. all the storage ports
- B. all the virtual host bus adapters from the server
- C. all the uplink Fibre Channel ports
- D. all the VSANs from the server

Answer: C