



KaozhengPro

# IT認證考試題庫 專業平臺

考證寶提供最新考古題與模擬試題  
協助您高效通過認證考試

[www.kaozhengpro.com](http://www.kaozhengpro.com)

**Exam** : **1Z1-061**

**Title** : Oracle Database 12c: SQL  
Fundamentals

**Version** : Demo

1.Evaluate the following SQL statement:

```
SQL> SELECT promo_id, promo_category
FROM promotions
WHERE promo_category = 'Internet' ORDER BY 2 DESC
UNION
SELECT promo_id, promo_category
FROM promotions
WHERE promo_category = 'TV'
UNION
SELECT promo_id, promo_category
FROM promotions
WHERE promo_category ='Radio';
```

Which statement is true regarding the outcome of the above query?

- A. It executes successfully and displays rows in the descending order of PROMO\_CATEGORY.
- B. It produces an error because positional notation cannot be used in the order by clause with set operators.
- C. It executes successfully but ignores the order by clause because it is not located at the end of the compound statement.
- D. It produces an error because the order by clause should appear only at the end of a compound query-that is, with the last select statement.

**Answer: D**

2.View the Exhibit and examine the structure of the product, component, and PDT\_COMP tables.

In product table, PDTNO is the primary key.

In component table, COMPNO is the primary key.

In PDT\_COMP table, (PDTNO, COMPNO) is the primary key, PDTNO is the foreign key referencing PDTNO in product table and COMPNO is the foreign key referencing the COMPNO in component table. You want to generate a report listing the product names and their corresponding component names, if the component names and product names exist.

Evaluate the following query:

```
SQL>SELECT pdtno, pdtname, compno, compname
FROM product _____ pdt_comp
USING (pdtno) _____ component USING (compno)
WHERE compname IS NOT NULL;
```

Which combination of joins used in the blanks in the above query gives the correct output?

**PRODUCT**

Name	Null?	Type
PDTNO	NOT NULL	NUMBER(3)
PDTNAME		VARCHAR2(25)
QTY		NUMBER(6,2)

**COMPONENT**

Name	Null?	Type
COMPNO	NOT NULL	NUMBER(4)
COMPNAME		VARCHAR2(25)
QTY		NUMBER(6,2)

**PDT\_COMP**

Name	Null?	Type
PDTNO	NOT NULL	NUMBER(2)
COMPNO	NOT NULL	NUMBER(3)

- A. JOIN; JOIN
- B. FULL OUTER JOIN; FULL OUTER JOIN
- C. RIGHT OUTER JOIN; LEFT OUTER JOIN
- D. LEFT OUTER JOIN; RIGHT OUTER JOIN

**Answer: C**

3.View the Exhibit for the structure of the student and faculty tables.

**STUDENT**

Name	Null?	Type
STUDENT_ID	NOT NULL	NUMBER(2)
STUDENT_NAME		VARCHAR2(20)
FACULTY_ID		VARCHAR2(2)
LOCATION_ID		NUMBER(2)

**FACULTY**

Name	Null?	Type
FACULTY_ID	NOT NULL	NUMBER(2)
FACULTY_NAME		VARCHAR2(20)
LOCATION ID		NUMBER(2)

You need to display the faculty name followed by the number of students handled by the faculty at the base location.

Examine the following two SQL statements:

#### Statement 1

```
SQL>SELECT faculty_name,COUNT(student_id)
      FROM student JOIN faculty
      USING (faculty_id, location_id)
      GROUP BY faculty_name;
```

#### Statement 2

```
SQL>SELECT faculty_name,COUNT(student_id)
      FROM student NATURAL JOIN faculty
      GROUP BY faculty_name;
```

Which statement is true regarding the outcome?

- A. Only statement 1 executes successfully and gives the required result.
- B. Only statement 2 executes successfully and gives the required result.
- C. Both statements 1 and 2 execute successfully and give different results.
- D. Both statements 1 and 2 execute successfully and give the same required result.

**Answer: D**

4.View the Exhibits and examine products and sales tables.

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER(6)
PROD_NAME	NOT NULL	VARCHAR2(50)
PROD_DESC	NOT NULL	VARCHAR2(4000)
PROD_CATEGORY	NOT NULL	VARCHAR2(50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2(20)
SUPPLIER_ID	NOT NULL	NUMBER(6)
PROD_STATUS	NOT NULL	VARCHAR2(20)
PROD_LIST_PRICE	NOT NULL	NUMBER(8,2)
PROD_MIN_PRICE	NOT NULL	NUMBER(8,2)

Table SALES		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER
CUST_ID	NOT NULL	NUMBER
TIME_ID	NOT NULL	DATE
CHANNEL_ID	NOT NULL	NUMBER
PROMO_ID	NOT NULL	NUMBER
QUANTITY_SOLD	NOT NULL	NUMBER(10,2)

You issue the following query to display product name and the number of times the product has been sold:

```
SQL>SELECT p.prod_name, i.item_cnt
      FROM (SELECT prod_id, COUNT(*) item_cnt
            FROM sales
            GROUP BY prod_id) i RIGHT OUTER JOIN products p
      ON i.prod_id = p.prod_id;
```

What happens when the above statement is executed?

- A. The statement executes successfully and produces the required output.
- B. The statement produces an error because item\_cnt cannot be displayed in the outer query.
- C. The statement produces an error because a subquery in the from clause and outer-joins cannot be used together.
- D. The statement produces an error because the group by clause cannot be used in a subquery in the from clause.

**Answer:** A

5.You want to create a table employees in which the values of columns EMPLOYEES\_ID and LOGIN\_ID must be unique and not null.

Which two SQL statements would create the required table?

- A) CREATE TABLE employees(  
employee\_id NUMBER,  
login\_id NUMBER,  
employee\_name VARCHAR2(25),  
hire\_date DATE,  
CONSTRAINT emp\_id\_pk PRIMARY KEY (employee\_id, login\_id));
- B) CREATE TABLE employees(  
employee\_id NUMBER CONSTRAINT emp\_id\_pk PRIMARY KEY,  
login\_id NUMBER UNIQUE,  
employee\_name VARCHAR2(25),  
hire\_date DATE);
- C) CREATE TABLE employees(  
employee\_id NUMBER,  
login\_id NUMBER,  
employee\_name VARCHAR2(100),  
hire\_date DATE,  
CONSTRAINT emp\_id\_uk UNIQUE (employee\_id, login\_id));
- D) CREATE TABLE employees(  
employee\_id NUMBER,  
login\_id NUMBER,  
employee\_name VARCHAR2(100),  
hire\_date DATE,  
CONSTRAINT emp\_id\_uk UNIQUE (employee\_id, login\_id),  
CONSTRAINT emp\_id\_nn NOT NULL (employee\_id, login\_id));
- D) CREATE TABLE employees(  
employee\_id NUMBER,  
login\_id NUMBER,  
employee\_name VARCHAR2(100),  
hire\_date DATE,  
CONSTRAINT emp\_id\_uk UNIQUE (employee\_id, login\_id),  
CONSTRAINT emp\_id\_nn NOT NULL (employee\_id, login\_id));
- E) CREATE TABLE employees(  
employee\_id NUMBER CONSTRAINT emp\_id\_nn NOT NULL,  
login\_id NUMBER CONSTRAINT login\_id\_nn NOT NULL,  
employee\_name VARCHAR2(100),  
hire\_date DATE,  
CONSTRAINT emp\_num\_id\_uk UNIQUE (employee\_id, login\_id));

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E
- F. Option F

Answer: D,E

6.View the Exhibit and examine the structure of the products table.

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER(6)
PROD_NAME	NOT NULL	VARCHAR2(50)
PROD_DESC	NOT NULL	VARCHAR2(4000)
PROD_CATEGORY	NOT NULL	VARCHAR2(50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2(20)
SUPPLIER_ID	NOT NULL	NUMBER(6)
PROD_STATUS	NOT NULL	VARCHAR2(20)
PROD_LIST_PRICE	NOT NULL	NUMBER(8,2)
PROD_MIN_PRICE	NOT NULL	NUMBER(8,2)

Using the products table, you issue the following query to generate the names, current list price, and discounted list price for all those products whose list price falls below \$10 after a discount of 25% is applied on it.

```
SQL>SELECT prod_name, prod_list_price,
           prod_list_price - (prod_list_price * .25) "DISCOUNTED_PRICE"
FROM products
WHERE discounted_price < 10;
```

The query generates an error. What is the reason for the error?

- A. The parenthesis should be added to enclose the entire expression.
- B. The double quotation marks should be removed from the column alias.
- C. The column alias should be replaced with the expression in the where clause.
- D. The column alias should be put in uppercase and enclosed within double quotation marks in the where clause.

Answer: C

7.Examine the structure proposed for the transactions table:

Name	Null?	Type
TRANS_ID	NOT NULL	NUMBER (6)
CUST_NAME	NOT NULL	VARCHAR2 (20)
CUST_STATUS	NOT NULL	CHAR
TRANS_DATE	NOT NULL	DATE
TRANS_VALIDITY		VARCHAR2
CUST_CREDIT_LIMIT		NUMBER

Which two statements are true regarding the creation and storage of data in the above table structure?

- A. The CUST\_STATUS column would give an error.
- B. The TRANS\_VALIDITY column would give an error.
- C. The CUST\_STATUS column would store exactly one character.
- D. The CUST\_CREDIT\_LIMIT column would not be able to store decimal values.

E. The TRANS\_VALIDITY column would have a maximum size of one character.

F. The TRANS\_DATE column would be able to store day, month, century, year, hour, minutes, seconds, and fractions of seconds

**Answer:** B,C

**Explanation:**

VARCHAR2(size) Variable-length character data (A maximum size must be specified: minimum size is 1; maximum size is 4, 000.)

CHAR [(size)] Fixed-length character data of length size bytes (Default and minimum size is 1; maximum size is 2, 000.)

NUMBER [(p, s)] Number having precision p and scale s (Precision is the total number of decimal digits and scale is the number of digits to the right of the decimal point; precision can range from 1 to 38, and scale can range from -84 to 127.)

DATE Date and time values to the nearest second between January 1, 4712 B.C., and December 31, 9999 A.D.

8. You need to create a table for a banking application. One of the columns in the table has the following requirements:

- 1) You want a column in the table to store the duration of the credit period.
- 2) The data in the column should be stored in a format such that it can be easily added and subtracted with date data type without using conversion functions.
- 3) The maximum period of the credit provision in the application is 30 days.
- 4) The interest has to be calculated for the number of days an individual has taken a credit for.

Which data type would you use for such a column in the table?

- A. DATE
- B. NUMBER
- C. TIMESTAMP
- D. INTERVAL DAY TO SECOND
- E. INTERVAL YEAR TO MONTH


**Answer:** D

9. Which three tasks can be performed using SQL functions built into Oracle Database?

- A. Displaying a date in a nondefault format
- B. Finding the number of characters in an expression
- C. Substituting a character string in a text expression with a specified string
- D. Combining more than two columns or expressions into a single column in the output

**Answer:** A,B,C

10. View the Exhibit and examine the description of SALES and PROMOTIONS tables.

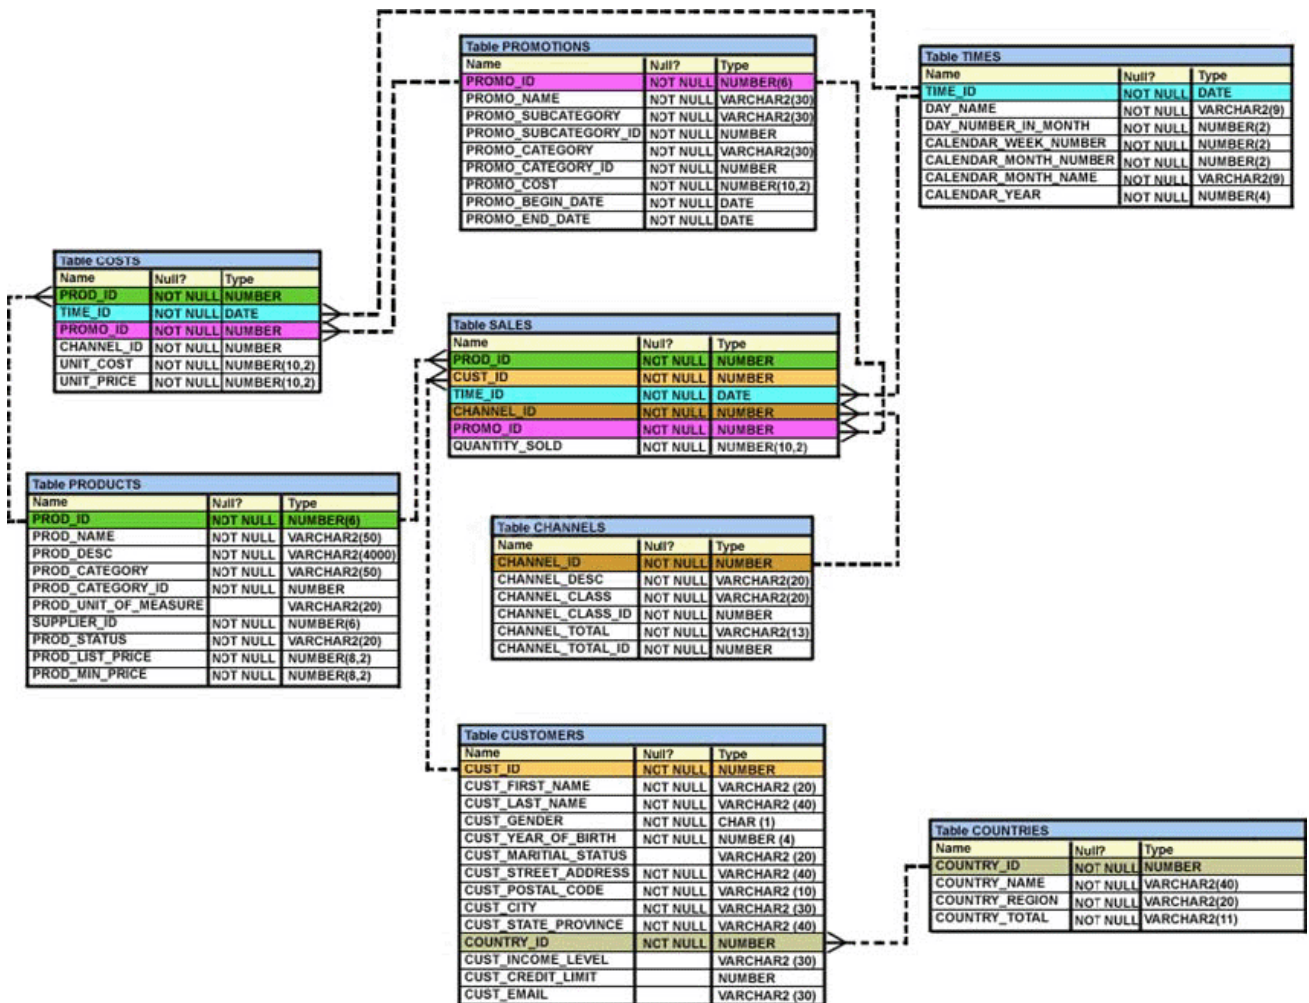

You want to delete rows from the sales table, where the PROMO\_NAME column in the promotions table has either blowout sale or everyday low prices as values.

Which three delete statements are valid?

- A) DELETE  
FROM sales  
WHERE promo\_id = (SELECT promo\_id  
FROM promotions  
WHERE promo\_name = 'blowout sale')  
AND promo\_id = (SELECT promo\_id  
FROM promotions  
WHERE promo\_name = 'everyday low price');
- B) DELETE  
FROM sales  
WHERE promo\_id = (SELECT promo\_id  
FROM promotions  
WHERE promo\_name = 'blowout sale')  
OR promo\_id = (SELECT promo\_id  
FROM promotions  
WHERE promo\_name = 'everyday low price');
- C) DELETE  
FROM sales  
WHERE promo\_id IN (SELECT promo\_id  
FROM promotions  
WHERE promo\_name = 'blowout sale'  
OR promo\_name = 'everyday low price');
- D) DELETE  
FROM sales  
WHERE promo\_id IN (SELECT promo\_id  
FROM promotions  
WHERE promo\_name IN ('blowout sale',  
everyday low price'));

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer:** B,C,D