



KaozhengPro

IT認證考試題庫 專業平臺

考證寶提供最新考古題與模擬試題
協助您高效通過認證考試

www.kaozhengpro.com

Exam : **HPE6-A44**

Title : Scalable WLAN Design and
Implementation (SWDI) 8

Version : DEMO

1.An administrator adds local administrative accounts to manage the Aruba Mobility Controllers (MCs). Which role should be assigned to an administrator who needs to only generate reports and monitor WLANS and ports?

- A. Location-api-management
- B. Network-operations
- C. Root
- D. AP-provisioning

Answer: B

2.Refer to the exhibit.

```
Last synchronization time: Thu Apr 13 07:42:48 2017
To Master Switch at 10.254.10.101: succeeded
WMS Database backup file size: 39121 bytes
Local User Database backup file size: 29694 bytes
Global AP Database backup file size: 13375 bytes
IAP Database backup file size: 3750 bytes
Airgroup Database backup file size: 3052 bytes
License Database backup file size: 5358 bytes
CPSec Database backup file size: 3224 bytes
Bocmgr Database backup file size: 6016 bytes
Synchronization took 1 second
```


```
1 synchronization attempted
0 synchronization have failed
Periodic synchronization is enabled and runs every 60 minutes
Synchronization doesn't include Captive Portal Custom data
Airmatch database gets synchronized periodically. Last synchronization time:
2017-04-13 07:22:2019:20:24
```

What can be determined from the command output shown in the exhibit?

- A. The synchronized data is protected by VRRP.
- B. The command was executed on the standby Mobility Master (MM).
- C. The synchronization period is at its default value.
- D. The other Mobility Master (MM) is the active license server.

Answer: C

3.Refer to the exhibit.

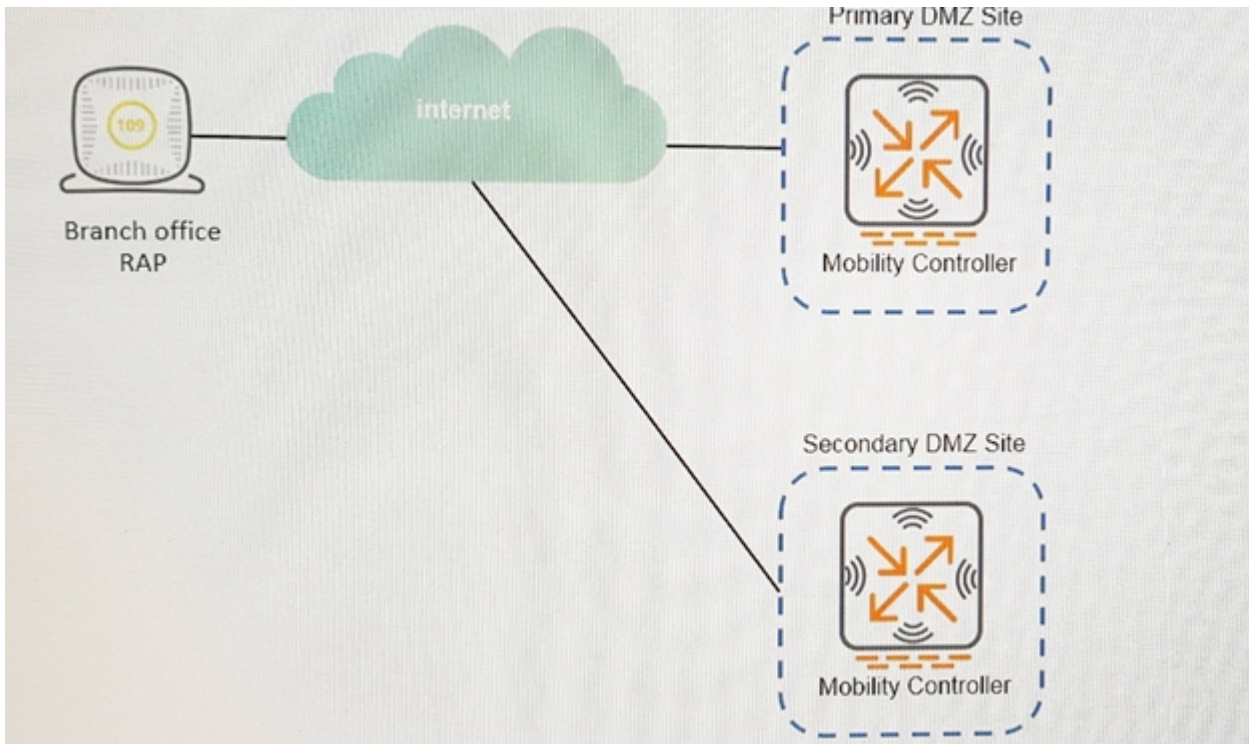

An administrator supports a RAP at a branch office shown in the exhibit. The company has one Mobility Controller (MC) at the Primary DMZ site and one at the Secondary DMZ site. The RAP is configured to connect to only the MC at the Primary DMZ site. A network outage with the ISP at the Primary DMX site causes the RAP to reboot. Upon reboot, the RAP cannot build a tunnel to the Secondary DMZ site MC because the administrator forgot to add the Second LMS IP address to the AP Group configuration. Once the RAP can successfully connect, the administrator can add the Secondary DMZ MC as a backup LMS to fix the AP Group.

What should the administrator implement to allow the RAP to connect to the MC at the Secondary DMZ site while the outage at the primary site persists?

- A. Dynamic discovery through DHCP Option 43
- B. Static configuration from apboot mode
- C. Dynamic discovery through DHCP Option 60
- D. Dynamic discovery through multicast ADP

Answer: A

4. An administrator supports a cluster of four Aruba Mobility Controllers (MCs) with management addresses of 10.1.100.101, 10.1.100.102, 10.1.100.103, and 10.1.202.181. The administrator accesses an AP associated with this cluster, reboots it and accesses apboot mode. The administrator executes the printenv command.

Which AP parameter contains the IP addresses of the cluster members that the AP should use to connect to the cluster?

- A. Nodelist
- B. Servername
- C. Master_ip
- D. Cfg_lms

Answer: A

5.A VIA client tries to initially connect to corporate office controller through an intermediate firewall. However, the VPN connection fails. The administrator examines the firewall rules and determines that rules for UDP 4500 and UDP 500 are configured.

Which additional protocol must be allowed in the firewall rules to resolve this connection failure?

- A. TCP 22
- B. TCP 443
- C. UDP 8200
- D. ESP

Answer: B